

# Vacu-Fresh®

Ready

Fresh

GO!

## CONVEYORIZED VACUUM SYSTEM

*Advanced European Technology at Affordable Prices*



Extends Shelf Life

Enhances Color & Taste

Reduces Shrink

Reduces Oxidation



**VFB-800 or VFB-1100 BELTED CHAMBER VACUUM PACKAGING MACHINE**  
**VFST-700 or VFST-1000 CONVEYORIZED SHRINK TUNNEL**

**DESIGNED TO OUTPERFORM TRADITIONAL PACKAGING SYSTEM!**

### BELTED CHAMBER VACUUM PACKAGING

Stainless Steel Construction • Fully Automatic • Operation Electronic System Digital Control • Water Resistant Electrical Box • Computerized Water Resistant Control Panel • (20 Programs with Oil Indicator) • 10 mm wide seals • Bladder Activated Sealing • Heavy-Duty Casters • Air Assist • Overload Warning Indicator • Oil Change Indicator  
Options: Top and Bottom sealing, gas flush, custom size, perforation knife cut-off system, water cooling system, pump size, booster pump, auto/manual operations, custom size available

### CONVEYORIZED SHRINK TUNNEL

Stainless Steel Construction • Easy access for Cleaning and Maintenance • Simple Push Button Cycle Operation  
Electric Heating • On/Off Indicator light • Easy Fill and Drain Tank • Low Energy Consumption  
Auto Dip Tank with Conveyor • Option: Voltage

► Higher Productivity ► Better Seal ► Easier Cleaning & Maintenance ► Reduced Noise ► More Package Sizes

We provide  
technical support and  
service for all machines  
that we sell

**MPBS INDUSTRIES**

Equipment for Industrial Food Processing & Packaging

2820 East Washington Blvd. Los Angeles CA 90023  
323-268-8514 ♦ 323-268-6305 (fax) ♦ www.mpbs.com  
Hours: 8:00 - 4:30 PM  
Se Habla Espanol



Since 1938


# Vacu-Fresh®

## Conveyorized Vacuum Packaging System

### Technical Specifications

MODEL	BELTED VFB-800	BELTED VFB-1100	MODEL	SHRINK TUNNEL VFST-700	SHRINK TUNNEL VFST-1000
Chamber Size (F) (H)	35" (890 mm) 37" (940 mm)	53" (1346 mm) 37" (940 mm)	Maximum Product Height	11" (275 mm)	11" (275 mm)
Chamber Height (E)	8" (200 mm)	10" (250 mm)	Immersion Platform Size (A) Immersion Platform Size (B)	34" (870 mm) 25" (630 mm)	43" (1092 mm) 35" (886 mm)
Distance Between Seal Bars (B)	25" (635 mm)	30" (762 mm)	Immersion Depth (D)	13" (330 mm)	13" (330 mm)
Seal Bar (A, A1)	32" (800 mm) x 2	43" (1100 mm) x 2	Cycle Time	Up to 8 / min	Up to 8 / min
Vacuum Pump Capacity	205 m <sup>3</sup> /h (8 HP)	305 m <sup>3</sup> /h (12 HP)	Volume of Water	85 gal / 320 liters	103 gal / 390 liters
Power	37 amps, 7.5 kW	48 amps, 10 kW	Power	80 amps, 18 kW	141.20 amps, 45 kW
Voltage	220 V / 60 Hz / 3 Ø	220 V / 60 Hz / 3 Ø	Voltage	230 V / 60 Hz / 3 Ø	230 V / 60 Hz / 3 Ø
Machine Size L x W x H	92" x 52" x 51" (2325 x 1320 x 1295 mm)	139" x 52" x 53" (3531 x 1321 x 1346 mm)	Machine Size L x W x H	55" x 40" x 51" (1397 x 1026 x 1295 mm)	66" x 48" x 51" (1675 x 1206 x 1300 mm)
Machine Weight	1320 lb (600 kg)	1984 lb (900 kg)	Machine Weight	882 lb (400 kg)	1200 lb (544 kg)

All specifications are subject to change without notice.

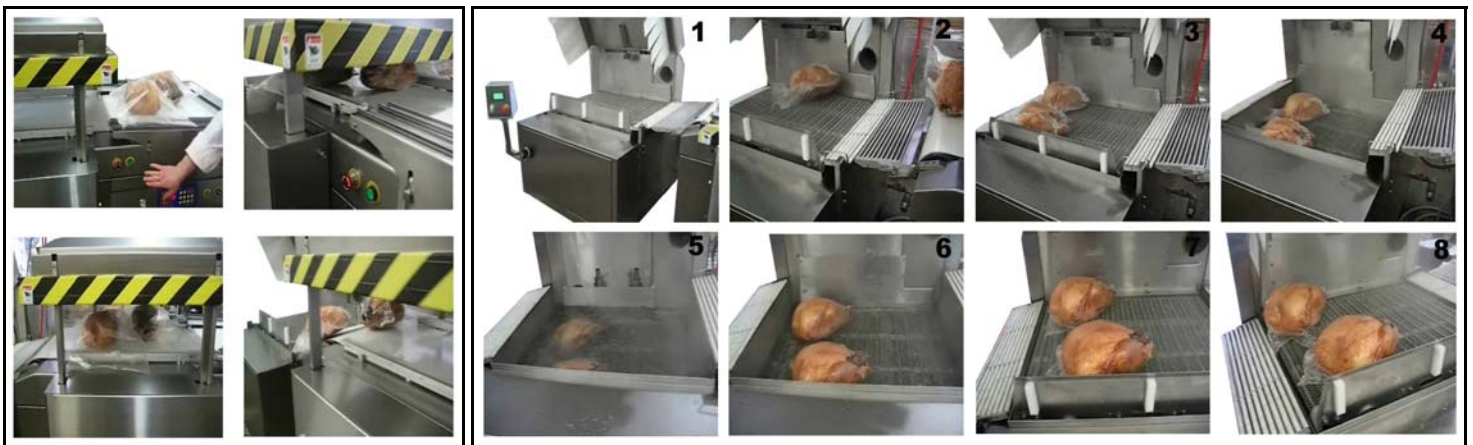

Belted Vacuum Packaging Machine

Conveyorized Shrink Tunnel

Vacu-Fresh® by MPBS Industries

Distributed by: